

# SRM VALLIAMMAI ENGINEERING COLLEGE

(An Autonomous Institution)

Approved by AICTE, Affiliated to Anna University, Chennai, Accredited by NBA,

'A' Grade Accreditation by NAAC & ISO 21001:2018 Certified Institution

SRM Nagar, Kattankulathur - 603 203

## QUESTION BANK



**IV SEMESTER**

**EI3464 – Control Systems**

**Regulation - 2023**

**Academic Year 2025 - 2026 (Even Sem)**

**Common to**

**Department of Electronics and Instrumentation Engineering**

**Department of Electrical and Electronics Engineering**

**Department of Electronics and Communication Engineering**

**Prepared by**

**Dr.S.Malathi, Professor/EEE**

**Dr.M.Banu Sundareswari, Associate Professor/EIE**

**Dr.C.Amali Associate Professor/ECE**

**Dr.N.Jothy, Assistant Professor (Sr.G) /ECE**

**Dr.S.R.Preethi, Associate Professor/ECE**



# SRM VALLIAMMAI ENGINEERING COLLEGE

(An Autonomous Institution)

Approved by AICTE, Affiliated to Anna University, Chennai, Accredited by NBA,  
'A' Grade Accreditation by NAAC & ISO 21001:2018 Certified Institution

SRM Nagar, Kattankulathur - 603 203



## QUESTION BANK


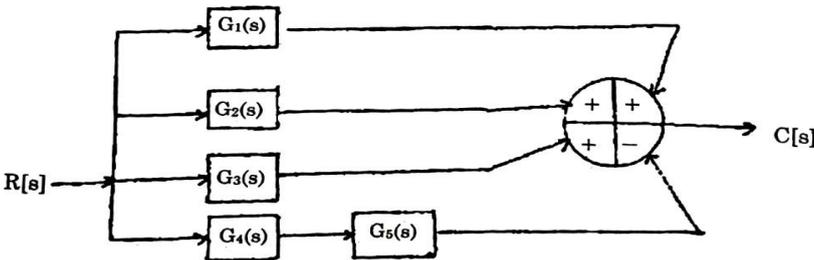
SUBJECT: E13464 - Control Systems

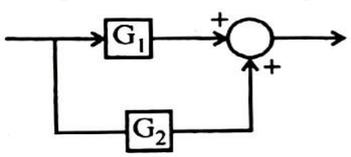
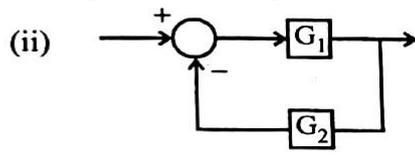
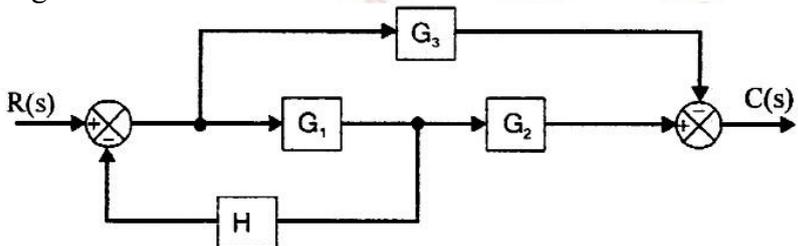
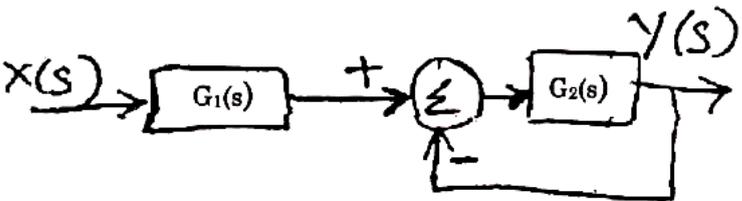
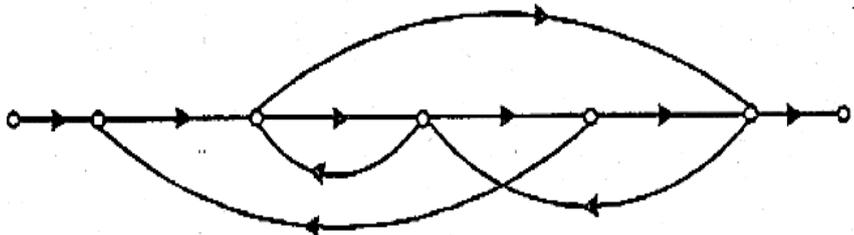
BRANCH / YEAR / SEM: EIE, EEE & ECE / II / IV

### UNIT I - SYSTEMS AND REPRESENTATION

Basic elements in control systems: – Open and closed loop systems – Electrical analogy of mechanical system– Transfer function – AC and DC servomotors - Synchro – Block diagram reduction techniques – Signal flow graphs.

#### PART – A

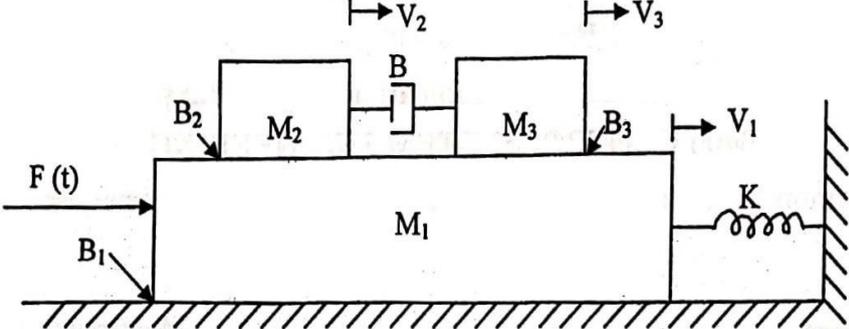
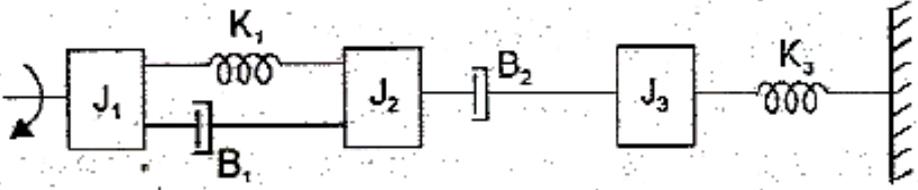
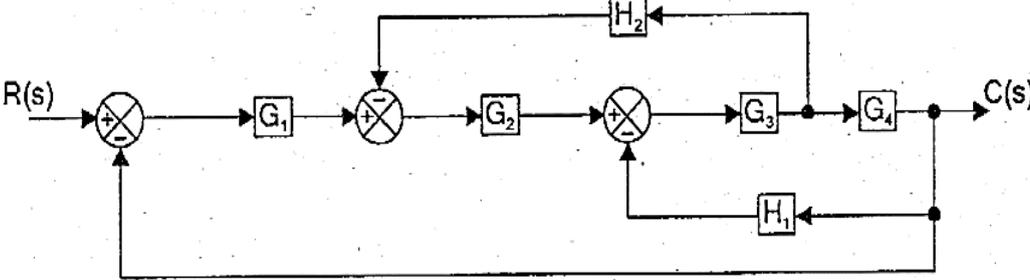
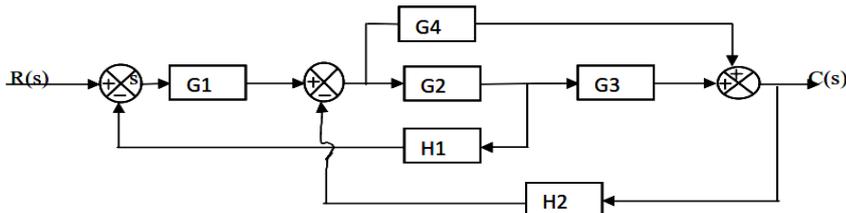
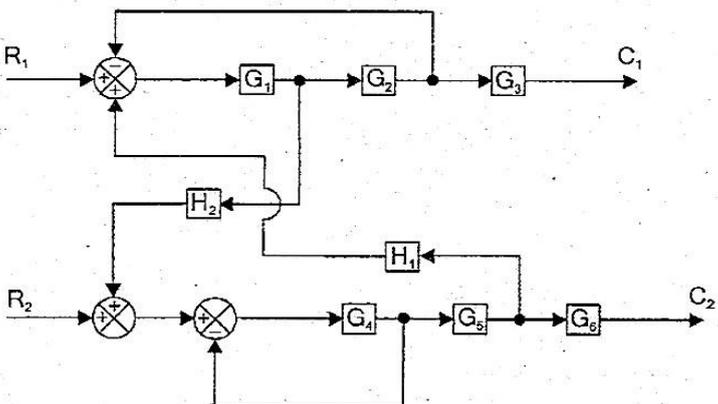
Q.No.	Questions	Course Outcome	BT Level	Competence
1.	What is system?	CO 1	BTL 1	Remember
2.	Define control system.	CO 1	BTL 1	Remember
3.	Distinguish between open loop and closed loop system.	CO 1	BTL 2	Understand
4.	Narrate components of feedback control system.	CO 1	BTL 2	Understand
5.	Define the transfer function of a control system.	CO 1	BTL 2	Understand
6.	Write the torque balance equation of a of an ideal rotational mass element.	CO 1	BTL 2	Understand
7.	Find the transfer function of the network given in figure below. 	CO 1	BTL 2	Understand
8.	Mention the basic elements of the translational mechanical system.	CO 1	BTL 2	Understand
9.	Name the two types of electrical analogous for mechanical system.	CO 1	BTL 1	Remember
10.	Write down the transfer function of the system whose block diagram is shown in below. 	CO 1	BTL 2	Understand

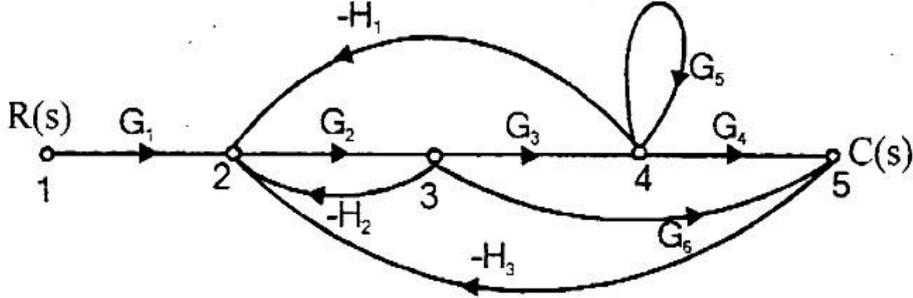
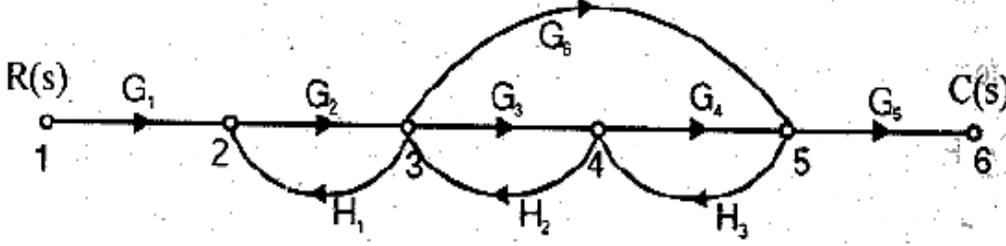
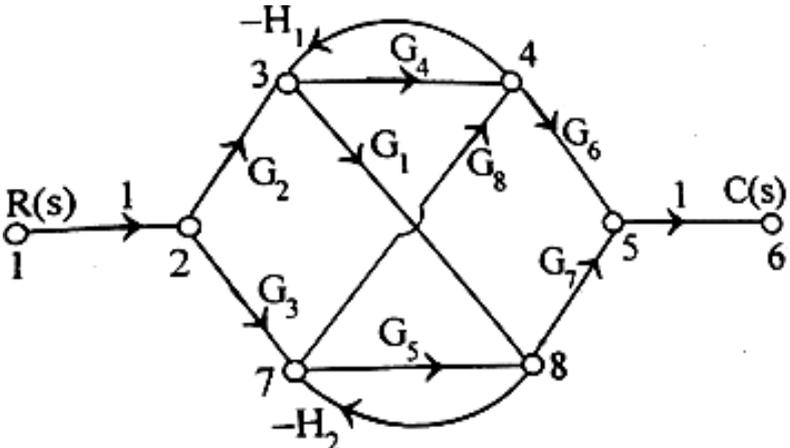
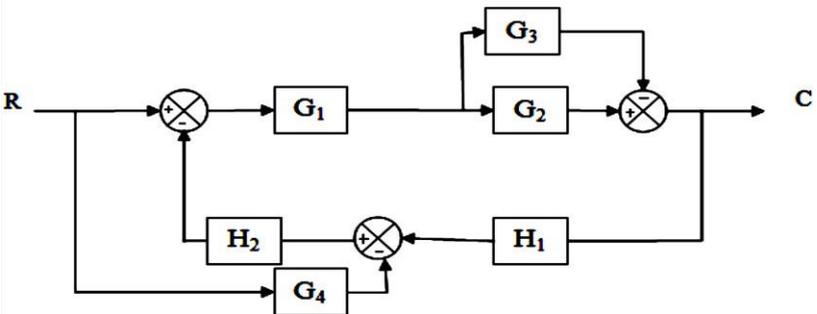
<p>11.</p>	<p>Draw the equivalent block diagram for the figures 1 and 2 given below:</p> <p>(i) </p> <p style="text-align: center;"><b>Figure-1</b></p> <p>(ii) </p> <p style="text-align: center;"><b>Figure-2</b></p>	<p>CO 1</p>	<p>BTL 2</p>	<p>Understand</p>
<p>12.</p>	<p>Observe the ideal spring in a control system and write the force balance equation.</p>	<p>CO 1</p>	<p>BTL 2</p>	<p>Understand</p>
<p>13.</p>	<p>How will you reduce two blocks in parallel using block diagram reduction technique?</p>	<p>CO 1</p>	<p>BTL 2</p>	<p>Understand</p>
<p>14.</p>	<p>Draw the equivalent signal flow graph for the system whose block diagram is as shown in figure.</p> 	<p>CO 1</p>	<p>BTL 2</p>	<p>Understand</p>
<p>15.</p>	<p>Evaluate the closed loop transfer function <math>Y(s)/X(s)</math> for the given system.</p> 	<p>CO 1</p>	<p>BTL 1</p>	<p>Remember</p>
<p>16.</p>	<p>Write the Mason's Gain formula.</p>	<p>CO 1</p>	<p>BTL 1</p>	<p>Remember</p>
<p>17.</p>	<p>Obtain the gain <math>\frac{Y}{X}</math> for the signal flow graph shown below:</p> 	<p>CO 1</p>	<p>BTL 2</p>	<p>Understand</p>
<p>18.</p>	<p>How the signal flow graph is used to represent a control system.</p>	<p>CO 1</p>	<p>BTL 2</p>	<p>Understand</p>
<p>19.</p>	<p>Define non-touching loop.</p>	<p>CO 1</p>	<p>BTL 2</p>	<p>Understand</p>
<p>20.</p>	<p>For the given signal flow graph, identify the number of forward paths and individual loops.</p> 	<p>CO 1</p>	<p>BTL 2</p>	<p>Understand</p>

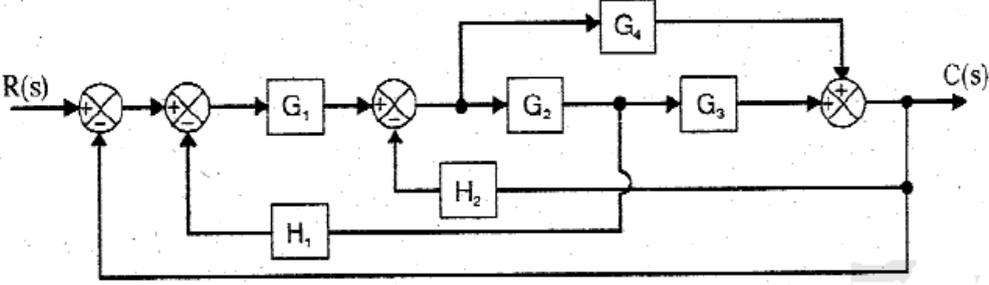
21.	Enumerate the features of a servo motor.	CO 1	BTL 2	Understand
22.	Differentiate AC and DC servo motor.	CO 1	BTL 2	Understand
23.	Analyze the need of electrical zero position in synchro transmitter.	CO 1	BTL 2	Understand
24.	Quote the differential equation for series and parallel RLC circuit.	CO 1	BTL 1	Remember

**PART-B**

1.	Write the differential equations governing the mechanical system, and determine the transfer function for the system. <b>(16)</b>	CO 1	BTL 3	Apply
2.	Formulate the differential equation defining the mechanical translational system given below. And also derive the transfer function for the system. <b>(16)</b>	CO 1	BTL 3	Apply
3.	Exhibit the mechanical rotational system with an appropriate differential equation and obtain the transfer function of the system. <b>(16)</b>	CO 1	BTL 3	Apply
4.	Examine the given electrical network and deduce the transfer function. <b>(16)</b>	CO 1	BTL 4	Analyze

<p>5.</p>	<p>Demonstrate the given mechanical rotational system with force-voltage and force-current electrical analogous circuits. (16)</p> 	<p>CO 1</p>	<p>BTL 4</p>	<p>Analyze</p>
<p>6.</p>	<p>Devise a torque-voltage, torque-current analogous circuit and verify it by writing mesh and node equations. (16)</p> 	<p>CO 1</p>		
<p>7.</p>	<p>Evaluate the transfer function <math>C(s)/R(s)</math> for the given system. (16)</p> 	<p>CO 1</p>	<p>BTL 3</p>	<p>Apply</p>
<p>8.</p>	<p>Obtain the transfer function <math>C(s)/R(s)</math> for the block diagram shown in figure using block diagram reduction technique. (16)</p> 	<p>CO 1</p>	<p>BTL 4</p>	<p>Analyze</p>
<p>9.</p>	<p>For the system represented by the block diagram shown in figure, determine <math>C_1/R_1</math> or <math>C_2/R_2</math>.</p> 	<p>CO 1</p>	<p>BTL 3</p>	<p>Apply</p>

<p>10.</p>	<p>Apply Mason's gain formula to determine the transfer function of the given signal flow graph. (16)</p> 	<p>CO 1</p>	<p>BTL 3</p>	<p>Apply</p>
<p>11.</p>	<p>For the signal flow graph of the closed loop feedback system shown below, Determine the closed loop transfer function. (16)</p> 	<p>CO 1</p>	<p>BTL 4</p>	<p>Analyze</p>
<p>12.</p>	<p>Using the mason's gain formula formulate the gain of the following system: (16)</p> 	<p>CO 1</p>	<p>BTL 3</p>	<p>Apply</p>
<p>13.</p>	<p>Develop the transfer function for the block diagram shown in fig. using                  (i) Block diagram reduction technique. (8)                  (ii) Mason's Gain Formula. (8)</p> 	<p>CO 1</p>	<p>BTL 4</p>	<p>Analyze</p>

14.	Interpret the transfer function by converting the block diagram into signal flow graph. (16)	CO 1	BTL 4	Analyze
				
15.	Derive the transfer function of field Controlled DC servomotor with relevant diagram. (16)	CO 1	BTL 4	Analyze
16.	Derive the transfer function of armature Controlled DC servomotor with relevant diagram. (16)	CO 1	BTL 4	Analyze
17.	Explain the working principle of AC servomotor with relevant diagram. (16)	CO 1	BTL 4	Analyze

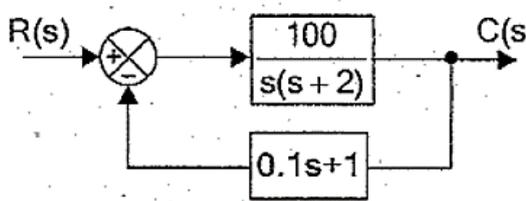


## UNIT II - TIME RESPONSE ANALYSIS

Time response: – Time domain specifications – Types of test input – I and II order system response – Error coefficients – Generalized error series – Steady state error – Effects of P, PI, PID modes of feedback control – Time response analysis.

Q.No.	Questions	Course Outcome	BT Level	Competence
1.	What is time response?	CO 2	BTL 1	Remember
2.	Name the test signals used in control system.	CO 2	BTL 1	Remember
3.	Write the mathematical expressions for step input and impulse input.	CO 2	BTL 2	Understand
4.	Point out the different time domain specifications.	CO 2	BTL 2	Understand
5.	Define peak overshoot with diagram.	CO1	BTL1	Remember
6.	Express the type and order of the following system $\frac{G(s)}{H(s)} = \frac{10}{s^3(s^2 + 2s + 1)}$	CO 2	BTL 2	Understand
7.	Distinguish between the order and type of system.	CO 2	BTL 2	Understand
8.	For a system described by $\frac{C(S)}{R(S)} = \frac{16}{S^2 + 8S + 16}$ Find the nature of the time response and justify.	CO 2	BTL 2	Understand
9.	Define pole and zero of a function F(s).	CO 2	BTL 2	Understand
10.	State the significance of rise time.	CO 2	BTL 2	Understand
11.	Estimate the damped frequency of oscillation for a second order system which has a damping ratio of 0.6 and natural frequency of oscillation is 10 rad/sec.	CO 2	BTL 2	Understand
12.	The closed loop transfer function of a second order system is given by $\frac{C(s)}{R(s)} = \frac{400}{(S^2 + 2S + 400)}$ Determine the damping ratio and natural frequency of oscillation.	CO 2	BTL 2	Understand
13.	A unity feedback system has an open loop transfer function of $G(s) = \frac{10}{(s + 1)(s + 2)}$ Formulate the steady state error for unit step input.	CO 2	BTL 2	Understand
14.	Exhibit the damped frequency of oscillation in a control system.	CO 2	BTL 2	Understand
15.	Solve for the type and order of the system $G(s)H(s) = \frac{(s + 4)}{(s - 2)(s + 0.25)}$	CO 2	BTL 2	Understand
16.	Analyze the response of first-order system with unit step input.	CO 2	BTL 2	Understand
17.	How did the type number of a system is identified? Mention its significance.	CO 2	BTL 2	Understand
18.	Give the steady state errors to a various standard input for type-2 system.	CO 2	BTL 2	Understand
19.	The open loop transfer function of a unity feedback control system is given by	CO 2	BTL 2	Understand

	$G(s) = \frac{10(S + 2)}{S^2(S + 5)}$ <p>Calculate the acceleration error constant.</p>			
20.	<p>Find the unit impulse of system given with zero initial conditions.</p> $H(s) = \frac{5S}{(S + 2)}$	CO 2	BTL 2	Understand
21.	Express the transfer functions of PI and PID controllers.	CO 2	BTL 2	Understand
22.	Why derivative controller is not used separately in control applications?	CO 2	BTL 2	Understand
23.	<p>For servo mechanisms with open loop transfer function is given by</p> $G(s) = \frac{1}{S^2 + 2S + 3}$ <p>Calculate position error and steady state error for a unit step input.</p>	CO 2	BTL 2	Understand
24.	Write the relation between generalized and static error coefficients.	CO 2	BTL 2	Understand
<b>PART-B</b>				
1.	<p>Name the various standard test signals? Draw the characteristics diagram and obtain the mathematical representation of the test signals. <b>(16)</b></p>	CO 2	BTL 3	Apply
2.	<p>Analyze the response of first order system for a unit step input. Plot the response of the system. <b>(16)</b></p>	CO 2	BTL 4	Analyze
3.	<p>Summarize the response of undamped second order system for unit step input. <b>(16)</b></p>	CO 2	BTL 3	Apply
4.	<p>Derive the expression for second order system for under damped case and when the input is unit step. <b>(16)</b></p>	CO 2	BTL 3	Apply
5.	<p>Derive the expression for second order system for critically damped case and when the input is unit step. <b>(16)</b></p>	CO 2	BTL 3	Apply
6.	<p>Obtain the response of unity feedback system whose open loop transfer function is</p> $G(s) = \frac{4}{s(s + 5)}$ <p>and when the input is unit step. <b>(16)</b></p>	CO 2	BTL 3	Apply
7.	<p>Derive Expressions for the following time domain specifications of second order under damped system due to unit step input.</p> <p>(i) Rise time. <b>(4)</b></p> <p>(ii) Peak time. <b>(4)</b></p> <p>(iii) Delay time. <b>(4)</b></p> <p>(iv) Peak over shoot. <b>(4)</b></p>	CO 2	BTL 4	Analyze
8.	<p>The unity feedback system is characterized by an open loop transfer function</p> $G(s) = \frac{K}{s(s + 10)}$ <p>(i) Examine the gain K, so that the system will have a damping ratio of 0.5 for this value of K. <b>(8)</b></p> <p>(ii) Examine peak overshoot for a unit step input. <b>(8)</b></p>	CO 2	BTL 3	Apply

9.	<p>A Unity feedback control system is characterized by open loop transfer function</p> $G(s) = \frac{10}{s(s+2)}$ <p>Find the rise time, percentage overshoot, peak time and settling time for a step input of 12 units. <b>(16)</b></p>	CO 2	BTL 4	Analyze
10.	<p>A closed loop servo is represented by the differential equation</p> $\frac{d^2c}{dt^2} + 8 \frac{dc}{dt} = 64e$ <p>where <math>c</math> is the displacement of the output shaft, <math>r</math> is the displacement of the input shaft and <math>e = r - c</math>. Determine undamped natural frequency, damping ratio and percentage maximum overshoot for unit step input. <b>(16)</b></p>	CO 2	BTL 3	Apply
11.	<p>For a unity feedback control system, the open loop transfer function is</p> $G(s) = \frac{10(s+2)}{s^2(s+1)}$ <p>(i) Find the position, velocity, acceleration error constants. <b>(8)</b></p> <p>(ii) Compute the steady state error when the input is <math>R(s)</math> where <b>(8)</b></p> $R(s) = \frac{3}{s} - \frac{2}{s^2} + \frac{1}{3s^3}$	CO 2	BTL 3	Apply
12.	<p>For the given open loop transfer function <math>G(s)</math> for servomechanism, interpret what type of input signal give rise to a constant steady state error and calculate the value. <b>(16)</b></p> $G(s) = \frac{10}{s^2(s+1)(s+2)}$	CO 2	BTL 3	Apply
13.	<p>Measurements conducted on a servo mechanism show that the system response to be <math>c(t) = 1 + 0.2e^{-60t} - 1.2e^{-10t}</math> when subjected to a unit step input. <b>(16)</b></p> <p>(i) Obtain an expression for closed loop transfer function. <b>(8)</b></p> <p>(ii) Compute the undamped natural frequency and damping ratio. <b>(8)</b></p>	CO 2	BTL 3	Apply
14.	<p>A positional control system with velocity feedback is shown. Compute the response of the system for unit step input. <b>(16)</b></p> 	CO 2	BTL 4	Analyze
15.	<p>A unity feedback system has the forward transfer function</p> $G(s) = \frac{K(2s+1)}{s(5s+1)(1+s)^2}$ <p>When the input is <math>r(t) = 1 + 6t</math>. Evaluate the minimum value of <math>K</math> so that the steady state error is less than 0.1 <b>(16)</b></p>	CO 2	BTL 4	Analyze

16.	Calculate the static error coefficients for a system whose transfer function is $G(s)H(s) = \frac{10}{s(1+s)(1+2s)}$ . And also Calculate the steady state error for $r(t) = 1 + t + \frac{t^2}{2}$ . <span style="float: right;"><b>(16)</b></span>	CO 2	BTL 4	Analyze
17.	Examine the Effects of P, PI, PID modes of feedback control. <span style="float: right;"><b>(16)</b></span>	CO 2	BTL 4	Analyze



## UNIT III - FREQUENCY RESPONSE ANALYSIS

Frequency response: - Bode plot - Polar plot - Determination of closed loop response from open loop response  
- Correlation between frequency domain and time domain specifications.

## PART - A

Q.No.	Questions	Course Outcome	BT Level	Competence	
1.	Define Phase margin.	CO 4	BTL 1	Remember	
2.	Define gain margin.	CO 4	BTL 1	Remember	
3.	The damping ratio and natural frequency of oscillations of a second order system is 0.3 and 3 rad/sec respectively. Calculate resonant frequency and resonant peak.	CO 4	BTL 2	Understand	
4.	Evaluate the shape of polar plot for the open loop transfer function $G(s)H(s) = \frac{1}{s(1 + Ts)}$	CO 4	BTL 2	Understand	
5.	Show the shape of polar plot for the transfer function $G(s) = \frac{K}{s(1 + sT_1)(1 + sT_2)}$	CO 4	BTL 2	Understand	
6.	Why frequency domain analysis is needed?	CO 4	BTL 2	Understand	
7.	List the advantages of Frequency Response Analysis.	CO 4	BTL 1	Remember	
8.	Define phase cross over frequency.	CO 4	BTL 1	Remember	
9.	Define gain cross over frequency.	CO 4	BTL 1	Remember	
10.	State the significance of Nichol's plot.	CO 4	BTL 1	Remember	
11.	Demonstrate the correlation between time and frequency response.	CO 4	BTL 2	Understand	
12.	Differentiate non-minimum phase and minimum phase systems.	CO 4	BTL 2	Understand	
13.	Discuss about the corner frequency in frequency response analysis?	CO 4	BTL 2	Understand	
14.	Determine the phase angle of the given transfer function $G(s) = \frac{10}{s(1 + 0.4s)(1 + 0.1s)}$	CO 4	BTL 2	Understand	
15.	A second order system has peak over shoot = 50% and period of oscillations 0.2 seconds. Tell the resonant frequency.	CO 4	BTL 2	Understand	
16.	What does, a gain margin close to unity or phase margin close to zero indicate?	CO 4	BTL 2	Understand	
17.	Draw the approximate polar plot for a Type 0 second order system.	CO 4	BTL 2	Understand	
18.	Define the terms: resonant peak and resonant frequency.	CO 4	BTL 1	Remember	
19.	What is meant by cut-off frequency?	CO 4	BTL 2	Understand	
20.	Quote how will you get the closed loop frequency response from open loop response?	CO 4	BTL 1	Remember	CO 4
21.	List the uses of Nichol's Chart.	CO 4	BTL 1	Remember	CO 4

22.	Draw the polar plot of $G(s) = \frac{1}{1+sT}$ .	CO 4	BTL 2	Understand
23.	Quote the corner frequency of $G(s) = \frac{10}{s(1+0.5s)}$ .	CO 4	BTL 2	Understand
24.	List frequency domain specifications.	CO 4	BTL 1	Remember
<b>PART-B</b>				
1.	Plot the bode diagram for the given transfer function and estimate the gain and phase cross over frequencies. <b>(16)</b> $G(s) = \frac{10}{s(1+0.4s)(1+0.1s)}$	CO 4	BTL 3	Apply
2.	Sketch the bode plot for the transfer function $G(s) = \frac{75(1+0.2s)}{s(s^2+16s+100)}$ and determine phase margin and gain margin. <b>(16)</b>	CO 4	BTL 3	Apply
3.	Calculate the system gain K by sketching the Bode plot for the transfer function $G(s) = \frac{Ks^2}{(1+0.2s)(1+0.02s)}$ with gain cross over frequency of 5rad/sec. <b>(16)</b>	CO 4	BTL 4	Analyze
4.	Analyze the bode plot for the function given by <b>(16)</b> $G(s) = \frac{5(1+2s)}{(1+4s)(1+0.25s)}$	CO 4	BTL 3	Apply
5.	Given $G(s) = \frac{Ke^{-0.2s}}{s(s+2)(s+8)}$ Draw the Bode plot and Calculate K for the following two cases: <b>(16)</b> (i) Gain margin equal to 6db. (ii) Phase margin equal to 45°.	CO 4	BTL 3	Apply
6.	Sketch the Bode plot and hence evaluate Gain cross over frequency, Phase cross over frequency, Gain margin and Phase margin for the function <b>(16)</b> $G(s) = \frac{10(s+3)}{s(s+2)(s^2+4s+100)}$	CO 4	BTL 4	Analyze
7.	Demonstrate the bode plot for the system whose open loop transfer function is given below and Find (i) Gain margin (ii) Phase margin and (iii) closed loop stability. <b>(16)</b> $G(s) = \frac{100}{s(s+1)(s+2)}$	CO 4	BTL 4	Analyze
8.	Evaluate open loop transfer function of a unity feedback system given by $G(s) = \frac{1}{s(1+s)(1+2s)}$ Sketch the polar plot. Evaluate the gain and phase margin for the above system.	CO 4	BTL 4	Analyze
9.	Report on the polar plot of an open loop transfer function of a unity feedback system given by $G(s) = \frac{1}{s^2(1+s)(1+2s)}$ Sketch the polar plot. Evaluate the gain and phase margin for the above system.	CO 4	BTL 4	Analyze

10.	Construct the polar plot and determine the gain margin and phase margin of a unity feedback control system whose open loop transfer function is, <b>(16)</b> $G(s) = \frac{(1 + 0.2s)(1 + 0.025s)}{s^3(1 + 0.005s)(1 + 0.001s)}$	CO 4	BTL 4	Analyze
11.	Consider a unity feedback system with open loop transfer function $G(s) = \frac{1}{s(1 + s^2)}$ From the polar plot and determine the gain and phase margin. <b>(16)</b>	CO 4	BTL 3	Apply
12.	Describe the procedure for obtaining the polar plot for a system whose open loop transfer function is <b>(16)</b> $G(s) = \frac{4}{(s + 2)(s + 4)}$	CO 4	BTL 3	Apply
13.	Consider a unity feedback system having an open loop transfer function $G(s) = \frac{K}{s(1 + 0.2s)(1 + 0.05s)}$ Sketch the polar plot and determine the value of K so that <b>(16)</b> <b>(i)</b> gain margin is 18 dB. <b>(ii)</b> phase margin is $60^\circ$ .	CO 4	BTL 4	Analyze
14.	Sketch the polar plot of a unity feedback system with open loop transfer function given by, $G(s) = \frac{50}{s(s + 1)(s + 5)(s + 10)}$ and calculate the gain and phase margins of the closed loop system. <b>(16)</b>	CO 4	BTL 3	Apply
15.	Using polar plot, calculate gain cross over frequency phase cross over frequency, gain margin and phase margin of feedback system with open loop transfer function. <b>(16)</b> $G(s) = \frac{10}{s(1 + 0.2s)(1 + 0.002s)}$	CO 4	BTL 4	Analyze
16.	Solve using Nichol's chart to obtain closed loop frequency response from open loop frequency response of a unity feedback system. Explain how the gain adjustment is carried out on this chart. <b>(16)</b>	CO 4	BTL 4	Analyze
17.	Draw the polar plot for the following transfer function and evaluate Gain cross over frequency, Phase cross over frequency, Gain margin and Phase margin for the transfer function $G(s) = \frac{400}{s(s + 2)(s + 10)}$ . <b>(16)</b>	CO 4	BTL 3	Apply

Q.No.	Questions	Course Outcome	BT Level	Competence
1.	What is characteristic equation?	CO 4	BTL 1	Remember
2.	Quote BIBO stability criterion.	CO 4	BTL 1	Remember
3.	State Routh's criterion for stability.	CO 4	BTL 1	Remember
4.	Write the necessary and sufficient condition for stability.	CO 4	BTL 1	Remember
5.	What conclusion can be provided when there is a row of all zeros in Routh array?	CO 4	BTL 2	Understand
6.	List the advantages of Routh Hurwitz stability criterion?	CO 4	BTL 1	Remember
7.	Give any two limitations of Routh stability criterion.	CO 4	BTL 1	Remember
8.	Find the range of K for stability of a closed loop system with characteristic equations $s^4 + 8s^3 + 36s^2 + 80s + K = 0$ using Routh stability criterion.	CO 4	BTL 2	Understand
9.	Point out the main objective of root locus analysis technique.	CO 4	BTL 2	Understand
10.	Interpret the relationship between roots of characteristic equation and stability.	CO 4	BTL 2	Understand
11.	Identify the meaning of relative stability.	CO 4	BTL 1	Remember
12.	Identify dominant pole location in s-plane and its significance.	CO 4	BTL 1	Remember
13.	Evaluate the effects of adding a zero to a system?	CO 4	BTL 2	Understand
14.	How centroid of the asymptotes found in root locus technique?	CO 4	BTL 2	Understand
15.	How will you find root locus on real axis?	CO 4	BTL 2	Understand
16.	Illustrate the effects of adding open loop poles and zeros on the nature of the root locus and on system?	CO 4	BTL 1	Remember
17.	Point out the regions of root locations for stable, unstable and limitedly stable systems.	CO 4	BTL 1	Remember
18.	Predict about the stability of the system when the roots of the characteristic equation are lying on imaginary axis?	CO 4	BTL 2	Understand
19.	State Nyquist stability criteria	CO 4	BTL 1	Remember
20.	Write the necessary and sufficient condition for stability.	CO 4	BTL 1	Remember
21.	Illustrate the need for compensation.	CO 4	BTL 2	Understand
22.	Summarize the lag-lead compensator using R and C network components.	CO 4	BTL 2	Understand
23.	Examine the circuit for lead compensator along with pole zero diagram.	CO 4	BTL 2	Understand
24.	Draw the circuit of lag compensator and draw its pole-zero diagram.	CO 4	BTL 2	Understand

1.	Using Routh criterion, determine the stability of the system represented by the characteristics equation, $s^4 + 8s^3 + 18s^2 + 16s + 5 = 0$ . Comment on the location of the roots of characteristic equation. <b>(16)</b>	CO 4	BTL 3	Apply
2.	Consider the sixth order system with the characteristic equation $s^6 + 2s^5 + 8s^4 + 12s^3 + 20s^2 + 16s + 16 = 0$ Use Routh-Hurwitz criterion to examine the stability of the system and comment on location of the roots of the characteristics equation. <b>(16)</b>	CO 4	BTL 4	Analyze
3.	Apply Routh array and determine the stability of the system represented by the characteristic equation, $s^5 + s^4 + 2s^3 + 2s^2 + 3s + 5 = 0$ Comment on the location of characteristic equation. <b>(16)</b>	CO 4	BTL 3	Apply
4.	The characteristic equation of a feedback control system is given by $F(s) = s^6 + 4s^5 + 8s^4 + 24s^3 + 20s^2 + 32s + 16 = 0$ . Analyze the stability analysis of the system using Routh's array and also find the frequency of oscillation. <b>(16)</b>	CO 4	BTL 3	Apply
5.	Evaluate the stability of the system by using Routh stability criterion for the equation $9s^5 - 20s^4 + 10s^3 - s^2 - 9s - 10 = 0$ Identify the location of the roots and comment. <b>(16)</b>	CO 4	BTL 3	Apply
6.	Determine the location of roots on S- Plane and stability for the polynomial $s^7 + 9s^6 + 24s^5 + 24s^4 + 24s^3 + 24s^2 + 23s + 15 = 0$ <b>(16)</b>	CO 4	BTL 3	Apply
7.	Identify the root locus of a unity feedback system having transfer function $G(s) = \frac{K}{s(s^2 + 4s + 13)}$ Find the range of K for which the system is stable. <b>(16)</b>	CO 4	BTL 3	Apply
8.	Sketch the root locus of the system whose open loop transfer function is $G(s) = \frac{K}{s(s+2)(s+4)}$ Find the value of K so that damping ratio of the closed loop system is 0.5. <b>(16)</b>	CO 4	BTL 4	Analyze
9.	The open loop transfer function of a unity feedback system $G(s) = \frac{K(s+9)}{s(s^2 + 4s + 11)}$ Sketch the root locus of the system. <b>(16)</b>	CO 4	BTL 3	Apply
10.	Sketch the root locus for the unity feedback system whose open loop transfer function is $G(s)H(s) = \frac{K}{s(s+4)(s^2 + 4s + 20)}$ <b>(16)</b>	CO 4	BTL 3	Apply
11.	Sketch root locus for the unity feedback system whose open loop transfer function is, $G(s)H(s) = \frac{K(s+1.5)}{s(s+1)(s+5)}$ <b>(16)</b>	CO 4	BTL 3	Apply
12.	Determine the range of K for which closed loop system is stable for the open loop transfer function $G(s)H(s) = \frac{K}{s(s+2)(s+10)}$ by drawing the Nyquist plot. <b>(16)</b>	CO 4	BTL 3	Apply

13.	Construct the Nyquist plot for a system whose open loop transfer function is given by $G(s)H(s) = \frac{K(1+s)^2}{s^3}$ Find the range of K for stability. <b>(16)</b>	CO 4	BTL 3	Apply
14.	Write down the procedure for designing lead compensator using bode plot. <b>(16)</b>	CO 4	BTL 4	Analyze
15.	Write down the procedure for designing lag-lead compensator using bode plot. <b>(16)</b>	CO 4	BTL 3	Apply
16.	Construct a phase lag series compensator for an open loop transfer function of certain unity feedback control system given by $G(s) = \frac{K}{s(s+4)(s+80)}$ It is desired to have phase margin to be at least $33^\circ$ and the velocity error constant $K_V = 30 \text{ Sec}^{-1}$ . <b>(16)</b>	CO 4	BTL 4	Analyze
17.	Design a lead compensator for a unity feedback system with open loop transfer function, $G(s) = \frac{K}{s(s+1)(s+5)}$ to satisfy velocity error constant $\geq 50$ and phase margin $\geq 20^\circ$ . <b>(16)</b>	CO 4	BTL 4	Analyze



Q.No.	Questions	Course Outcome	BT Level	Competence
1.	Write the state model of $n^{\text{th}}$ order system	CO 5	BTL 1	Remember
2.	Analyze the basic elements used to construct the state diagram?	CO 5	BTL 2	Understand
3.	Draw the block diagram representation of state model.	CO 5	BTL 2	Understand
4.	Mention the advantages of state space analysis?	CO 5	BTL 2	Understand
5.	List down the draw backs in transfer function model analysis?	CO 5	BTL 1	Remember
6.	Point out the limitations of physical system modelled by transfer function approach.	CO 5	BTL 2	Understand
7.	Illustrate the state model using the signal flow graph?	CO 5	BTL 1	Remember
8.	Define state and state variable	CO 5	BTL 1	Remember
9.	Discuss about state vector?	CO 5	BTL 2	Understand
10.	How will you analyze the controllability and observability of a system using Kalman's Test?	CO 5	BTL 2	Understand
11.	Give the condition for controllability by Kalman's method.	CO 5	BTL 1	Remember
12.	State the condition for observability by Gilberts method.	CO 5	BTL 1	Remember
13.	Describe about state space?	CO 5	BTL 2	Understand
14.	Summarize the disadvantages in choosing phase variable for state space modeling?	CO 5	BTL 2	Understand
15.	Outline the properties of state transition matrix?	CO 5	BTL 2	Understand
16.	State the solution of homogenous state equation	CO 5	BTL 1	Remember
17.	What do you mean by controllability?	CO 5	BTL 1	Remember
18.	Identify the difference between transfer function and state space system	CO 5	BTL 1	Remember
19.	Point out the state equation and output equation of the state model.	CO 5	BTL 2	Understand
20.	Develop the advantages and disadvantages in canonical form of state model	CO 5	BTL 1	Remember
21.	Formulate the block diagram of the state model of a discrete time system	CO 5	BTL 2	Understand
22.	Deduce the state model of $n^{\text{th}}$ order discrete time system	CO 5	BTL 1	Remember
23.	Evaluate the state model of a discrete time system using signal flow graph	CO 5	BTL 2	Understand
24.	Formulate the necessary condition to be satisfied for designing state feedback.	CO 5	BTL 2	Understand

PART-B				
1.	Obtain the state model of the given electrical network by choosing minimal number of state variables. <span style="float: right;">(16)</span>	CO 5	BTL 3	Apply
2.	Obtain the state model of the given electrical network by choosing $v_1(t)$ and $v_2(t)$ as state variables. <span style="float: right;">(16)</span>	CO 5	BTL 4	Analyze
3.	For the given mechanical system, write the differential equations governing the system. <span style="float: right;">(16)</span>	CO 5	BTL 3	Apply
Construct the state model of the given mechanical system. <span style="float: right;">(16)</span>				
4.	Construct a state model for the system characterized by the differential equation. <span style="float: right;">(16)</span> $\frac{d^3y}{dt^3} + 6 \frac{d^2y}{dt^2} + 11 \frac{dy}{dt} + 6y + u = 0$ Give the block diagram representation of the state model.	CO 5	BTL 3	Apply
5.	Obtain the state model of the system whose transfer function is given as, <span style="float: right;">(16)</span> $\frac{Y(s)}{U(s)} = \frac{10}{s^3 + 4s^2 + 2s + 1}$	CO 5	BTL 3	Apply
6.	For $A = \begin{bmatrix} 0 & 1 \\ -2 & -3 \end{bmatrix}$ <span style="float: right;">(16)</span> Compute the state transition matrix $e^{At}$ using Cayley-Hamilton theorem.	CO 5	BTL 3	Apply
7.	A linear time invariant system is described by the following state model. <span style="float: right;">(16)</span> $\begin{bmatrix} \dot{x}_1 \\ \dot{x}_2 \\ \dot{x}_3 \end{bmatrix} = \begin{bmatrix} 0 & 1 & 0 \\ 0 & 0 & 1 \\ -6 & -11 & -6 \end{bmatrix} \begin{bmatrix} x_1 \\ x_2 \\ x_3 \end{bmatrix} + \begin{bmatrix} 0 \\ 0 \\ 2 \end{bmatrix} u$ $y = [1 \ 0 \ 0] \begin{bmatrix} x_1 \\ x_2 \\ x_3 \end{bmatrix}$ Transform this state model in to a canonical state model.	CO 5	BTL 4	Analyze

8.	Deduce the canonical state model for the given transfer function. <b>(16)</b> $\frac{Y(s)}{U(s)} = \frac{10(s+4)}{s(s+1)(s+3)}$	CO 5	BTL 3	Apply
9.	Obtain the transfer function of the system defined by the following state space model. <b>(16)</b> $\begin{bmatrix} \dot{x}_1 \\ \dot{x}_2 \\ \dot{x}_3 \end{bmatrix} = \begin{bmatrix} -2 & 1 & 0 \\ 0 & -3 & 1 \\ -3 & -4 & -5 \end{bmatrix} \begin{bmatrix} x_1 \\ x_2 \\ x_3 \end{bmatrix} + \begin{bmatrix} 0 \\ 0 \\ 1 \end{bmatrix} u$ $y = [0 \quad 1 \quad 0] \begin{bmatrix} x_1 \\ x_2 \\ x_3 \end{bmatrix}$	CO 5	BTL 3	Apply
10.	A LTI system is characterized by homogenous state equation $\begin{bmatrix} \dot{x}_1 \\ \dot{x}_2 \end{bmatrix} = \begin{bmatrix} 1 & 0 \\ 1 & 1 \end{bmatrix} \begin{bmatrix} x_1 \\ x_2 \end{bmatrix} \quad X_0 = \begin{bmatrix} 1 \\ 0 \end{bmatrix}$ Compute the solution of the homogenous equation, assuming initial state vector	CO 5	BTL 3	Apply
11.	Examine the controllability and observability of a system having following coefficient matrices. <b>(16)</b> $A = \begin{bmatrix} 0 & 1 & 0 \\ 0 & 0 & 1 \\ -6 & -11 & -6 \end{bmatrix}; B = \begin{bmatrix} 1 \\ 0 \\ 1 \end{bmatrix}; C^T = \begin{bmatrix} 10 \\ 5 \\ 1 \end{bmatrix}$	CO 5	BTL 3	Apply
12.	Consider the following plant of the state space representation: $A = \begin{bmatrix} 0 & 1 \\ -2 & -3 \end{bmatrix}; B = \begin{bmatrix} -2 \\ 2 \end{bmatrix}; C = [-2 \quad 0]$ Examine the controllability and observability of a state space formed by the system. <b>(16)</b>	CO 5	BTL 3	Apply
13.	Examine the controllability and observability of the system with state equation. <b>(16)</b> $\begin{bmatrix} \dot{x}_1 \\ \dot{x}_2 \\ \dot{x}_3 \end{bmatrix} = \begin{bmatrix} 0 & 1 & 0 \\ 0 & 0 & 1 \\ 0 & -2 & -3 \end{bmatrix} \begin{bmatrix} x_1 \\ x_2 \\ x_3 \end{bmatrix} + \begin{bmatrix} 0 \\ 0 \\ 1 \end{bmatrix} u$ $y = [3 \quad 4 \quad 1] \begin{bmatrix} x_1 \\ x_2 \\ x_3 \end{bmatrix}$	CO 5	BTL 3	Apply
14.	Elaborate whether the given system is completely Controllable and Observable <b>(16)</b> $\begin{bmatrix} \dot{x}_1 \\ \dot{x}_2 \\ \dot{x}_3 \end{bmatrix} = \begin{bmatrix} 0 & 0 & 1 \\ -2 & -3 & 0 \\ 0 & 2 & -3 \end{bmatrix} \begin{bmatrix} x_1 \\ x_2 \\ x_3 \end{bmatrix} + \begin{bmatrix} 0 \\ 2 \\ 0 \end{bmatrix} u$ $y = [1 \quad 0 \quad 0] \begin{bmatrix} x_1 \\ x_2 \\ x_3 \end{bmatrix}$	CO 5	BTL 4	Analyze
15.	Given that $A_1 = \begin{bmatrix} \sigma & 0 \\ 0 & \sigma \end{bmatrix}; A_2 = \begin{bmatrix} 0 & \omega \\ -\omega & 0 \end{bmatrix}; A_3 = \begin{bmatrix} \sigma & \omega \\ -\omega & \sigma \end{bmatrix}$ . Compute $e^{At}$ . <b>(16)</b>	CO 5	BTL 3	Apply
16.	For the given digital transfer function $\frac{Y(z)}{U(z)} = \frac{4z^3 - 12z^2 + 13z - 7}{(z-1)^2(z-2)}$ Develop the state model in Jordan Canonical Form. <b>(16)</b>	CO 5	BTL 4	Analyze
17.	The state model of a discrete time system is given by $X(k+1) = A X(k) + B U(k)$ $Y(k) = C X(k) + D U(k)$ Determine its transfer function. <b>(16)</b>	CO 5	BTL 4	Analyze